



SAFESTOP BOLLARD 15

**INNOVATIVE, INDUSTRIAL
SAFETY BOLLARDS KEEP
YOUR PEOPLE SAFE**

Shock-absorbing
base provides
ultimate stopping
power

THE MCCUE DIFFERENCE

HI, WE'RE MCCUE & WE MAKE SAFETY EASY!

Our innovative, impact-tested bollards safely stop moving material handling vehicles — protecting your people and your facility. With engineered materials that work together, we're revolutionizing safety barrier innovation with these three principles:



SUPERIOR STRENGTH

Designed to bring heavy machinery to a safe stop.



ENERGY ABSORPTION

Absorbs impacts to keep your people and your operations safe.



EASY INSTALL

Simple 4-anchor install with standard hardware and tools.

**KEEP YOUR OPERATIONS SAFE AND YOUR WORKFORCE SAFER WITH THE WORLD'S MOST
ADVANCED SAFETY BARRIERS — SPEAK TO A SAFETY SPECIALIST TODAY (800) 800-8503**



McCue

SAFER STOPS:

Bollard absorbs impact energy and attenuates shock to keep your people and equipment safe.


IMPACT

ENERGY




CLEAN FINISH:

Internal hardware means no catching points, not to mention better looks!

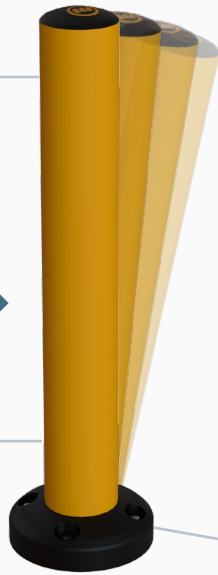


EASY INSTALLATION:

With 4 concrete anchors, SafeStop Bollards are easy to install and relocate.

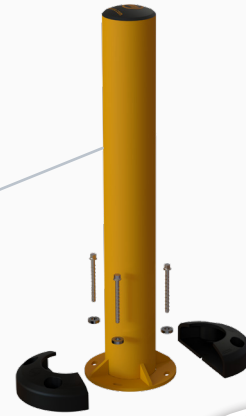

ULTIMATE STRENGTH:

A proprietary blend of synthetic elastomer and high strength steel absorbs impact energy.

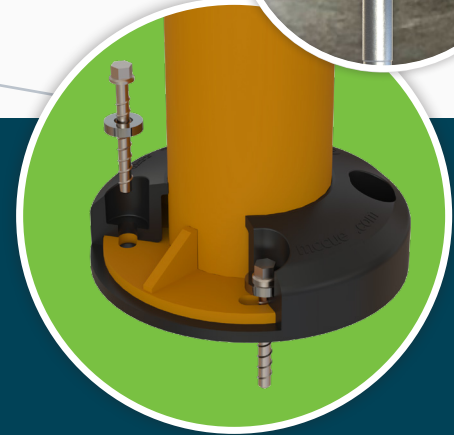

SAFESTOP BOLLARD 15

Meet **SafeStop Bollard 15**, our impact-absorbing bollard engineered to stop heavy equipment. **SafeStop Bollard 15** safely absorbs and withstands impacts up to 15,000 J, keeping your people safe and your facility damage-free.

INTENDED USES



RACK PROTECTION



DOOR & WALL PROTECTION




MACHINERY PROTECTION

* PATENTS PENDING

IMPACT TESTING

Rigorous product testing at the highest standard.

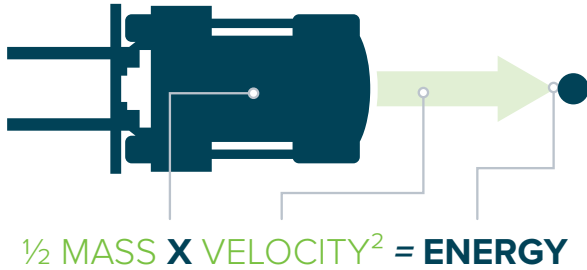


Ultimate Strength Rating
11,064 ft-lbs (15,000 J)

 X 





8,755 lbs (3971 kg) **6.15 mph (9.89 kmh)**

90°	11,064 ft-lbs	15,000 J
-----	---------------	----------

45°	15,649 ft-lbs	21,217 J
-----	---------------	----------

30°	22,127 ft-lbs	30,000 J
-----	---------------	----------

WHAT DOES 11,064 FT LBS (15,000 J) MEAN TO YOU?




MATERIAL PROPERTIES

BOLLARD DEFLECTION: The bend but don't break mentality.





Anchor Specifications:

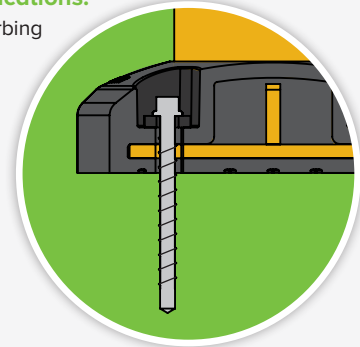The shock-absorbing anchor system protects the anchors and the floor.



	Working Temperatures	32°F-130°F (0°C-54°C)
	Toxicity	Not Hazardous



	Flammability	Does Not Easily Ignite
	REACH / RSCA / DSL	Compliant

* PATENTS PENDING

SAFESTOP **BOLLARD 15**

SafeStop Bollard 15
PART NUMBER: B15-K-048-307

Hardware included.

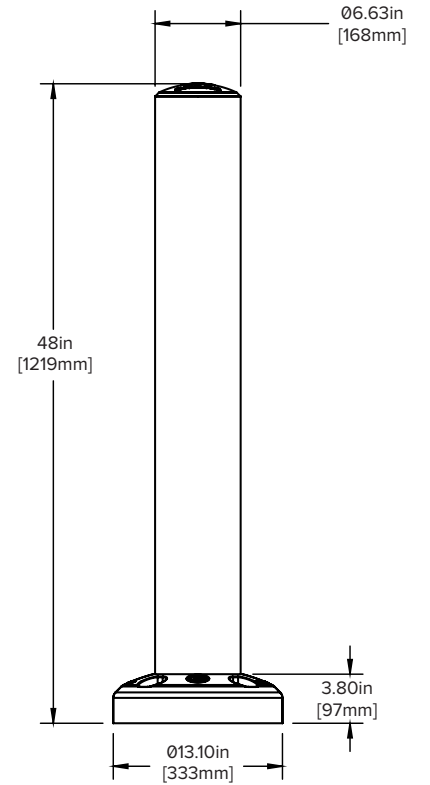

HOLE PATTERN
 SCALE 1:8

