

SAFESTOP FORKSHIELD

**PROTECTS YOUR PEOPLE
WITH AN INNOVATIVE
SHOCK-ABSORBING BARRIER**

*Flexible Elastomer + High Strength Steel =
Cushioned Blows & Limited Deflection*

THE MCCUE DIFFERENCE

HI, WE'RE MCCUE & WE MAKE SAFETY EASY!

Our innovative, impact-tested barriers safely stop fast-moving material handling vehicles — protecting your people and your facility. With engineered materials that work together, we're revolutionizing safety barrier innovation with these three principles:



SAFER IMPACTS

Strong, floor-mounted rail designed to bring heavy trucks to a stop.



SHOCK ABSORPTION

Absorbs impacts — with limited deflection — to keep your people safe.



EASY INSTALL

Simple install with standard hardware and tools.



McCue

EASY INSTALLATION:

Installs in minutes with just four concrete anchors and minimal assembly.

MINIMAL DEFLECTION:

Steel spine limits dynamic penetration and distributes impact energy.




SAFER STOPS:

Barrier shape designed to stop forklift impacts, fork intrusions and eliminate pinch points.

STRENGTH FROM SHAPE:

Its geometric arrangement of elastomer elements creates unparalleled impact performance.


See what's inside

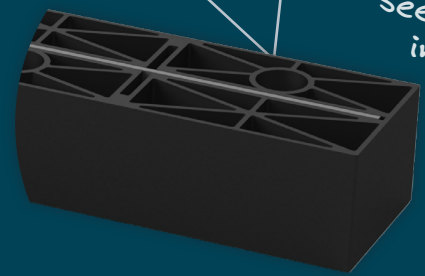


SAFESTOP FORKSHIELD

Meet **SafeStop ForkShield**, a strong floor-mounted barrier that safely stops moving material handling vehicles. Engineered to safely absorb impacts —with minimum deflection— to protect your people, workspace, and bottom line.


SIMPLE INSTALLATION

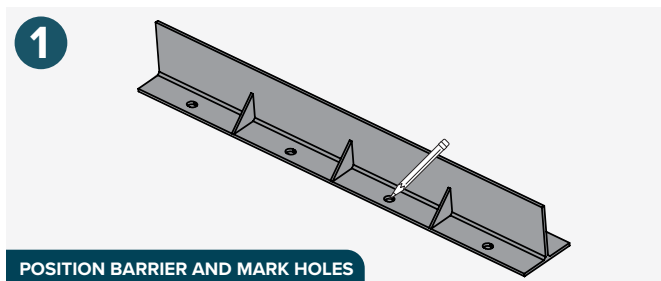


POSITION BARRIER AND MARK HOLES

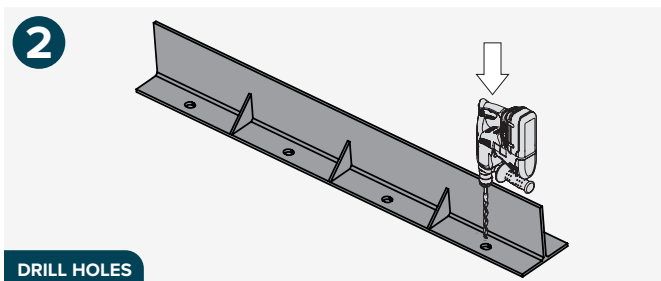

DRILL HOLES

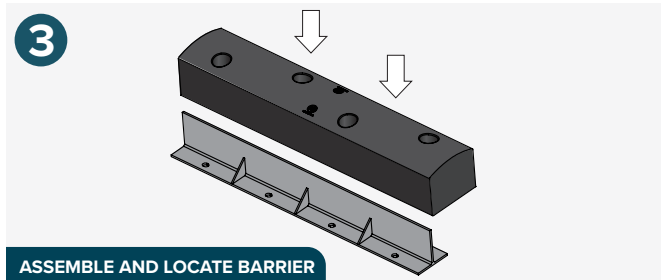

ASSEMBLE AND LOCATE BARRIER

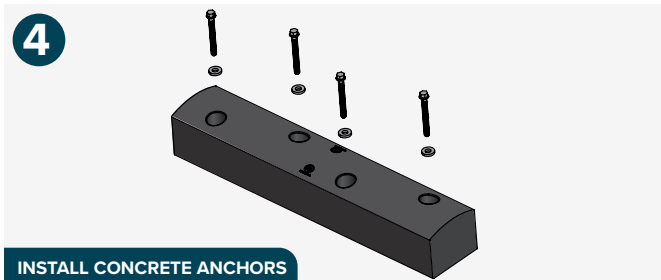


INSTALL CONCRETE ANCHORS

To see complete instructions, visit www.mccue.com!

* PATENTS PENDING

IMPACT TESTING

Rigorous product testing at the highest standard.

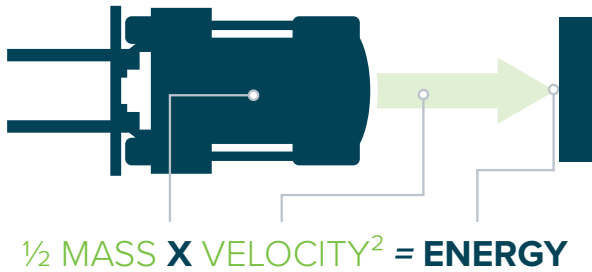


Ultimate Strength Rating
15,857 ft-lbs (21,500 J)

 **x** 





12,056 lbs (5469 kg) **6.27 mph (10.1 kmh)**

90°	15,857 ft-lbs	21,500 J
------------	----------------------	-----------------

45°	31,687 ft-lbs	42,962 J
------------	----------------------	-----------------


30°	63,376 ft-lbs	85,926 J
------------	----------------------	-----------------

WHAT DOES 15,857 FT LBS (21,500 J) MEAN TO YOU?




MATERIAL PROPERTIES

BARRIER DEFLECTION: Limited deflection and maximum energy absorption.





Anchor Specifications:

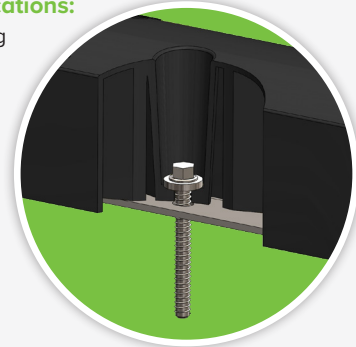A shock-absorbing anchor system protects both the anchors and the floor.



	Working Temperatures	32°F-130°F (0°C-54°C)
	Toxicity	Not Hazardous

	Flammability	Does Not Easily Ignite
	REACH / RSCA / DSL	Compliant

* PATENTS PENDING

SAFESTOP *FORKSHIELD*

SafeStop ForkShield
KIT NUMBER: SSFS-K-048-XXX

Hardware included
 Packed: 1 per box

