


SAFESTOP PEDESTRIAN GUARDRAIL

**INNOVATIVE GUARDRAILS
KEEP YOUR PEOPLE SAFE**

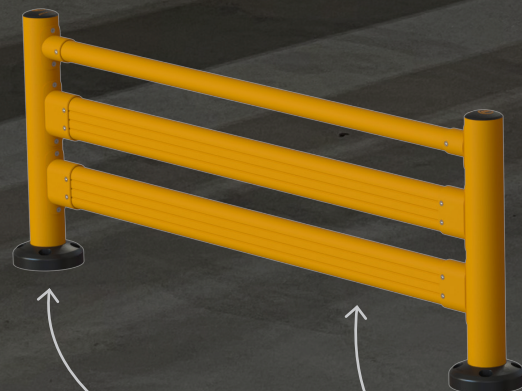

Strong uprights and flexible rails
provide ultimate stopping power

THE MCCUE DIFFERENCE

HI, WE'RE MCCUE & WE MAKE SAFETY EASY!

Our innovative, impact-tested barriers safely stop fast-moving material handling vehicles — protecting your people and your facility. With engineered materials that work together, we're revolutionizing safety barrier innovation with these three principles:



SAFER IMPACTS

Strong, floor-mounted rail designed to bring heavy trucks to a stop.



SHOCK ABSORPTION

Absorbs impacts — with limited deflection — to keep your people safe.




EASY INSTALL

Simple install with standard hardware and tools.




EASY-TO-CONFIGURE:
Modular rails and connectors allow for endless configurations.

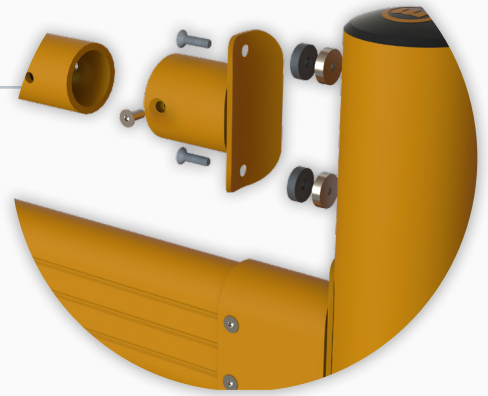

SAFER IMPACTS:
Proprietary rail connection provides unparalleled impact absorbency.

STOPPING POWER:
Industry-leading upright strength from shock-absorbing post technology.

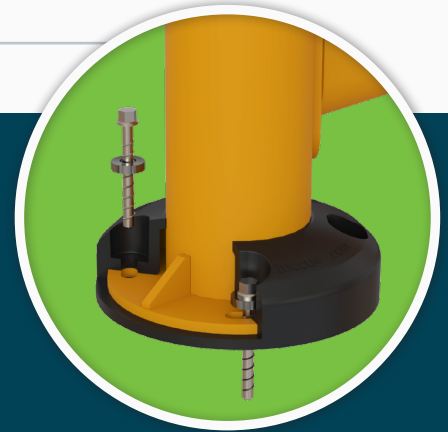


SAFESTOP PEDESTRIAN GUARDRAIL

Meet **SafeStop Pedestrian GuardRail**, a strong floor-mounted barrier that safely stops moving material handling vehicles. Engineered to safely absorb impacts —with minimum deflection — to protect your people, workspace, and bottom line.

HOW IT WORKS

Pedestrian GuardRail is packed full of innovative technology to safely stop heavy machinery. Upon impact, its reinforced uprights offer strength while its shock-absorbing rails flex to dissipate impact energy — keeping your operators, forklifts, and facility safe.

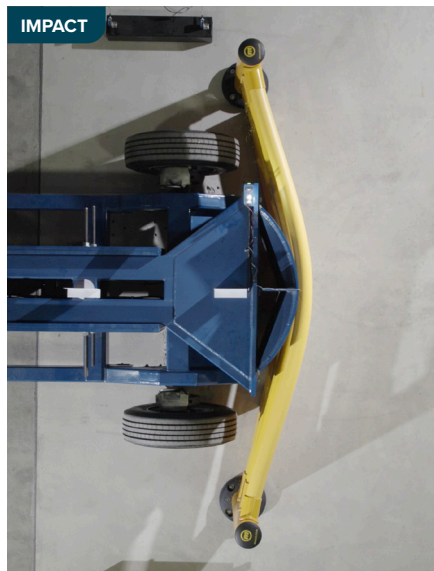


* PATENTS PENDING

IMPACT TESTING

Rigorous product testing at the highest standard.






$\frac{1}{2} \text{ MASS } \times \text{ VELOCITY}^2 = \text{ENERGY}$

90°	21,389 ft-lbs	29,000 J	45°	42,764 ft-lbs	57,988 J	30°	85,529 ft-lbs	115,977 J
------------	----------------------	-----------------	------------	----------------------	-----------------	------------	----------------------	------------------


WHAT DOES 21,389 FT LBS (29,000 J) MEAN TO YOU?

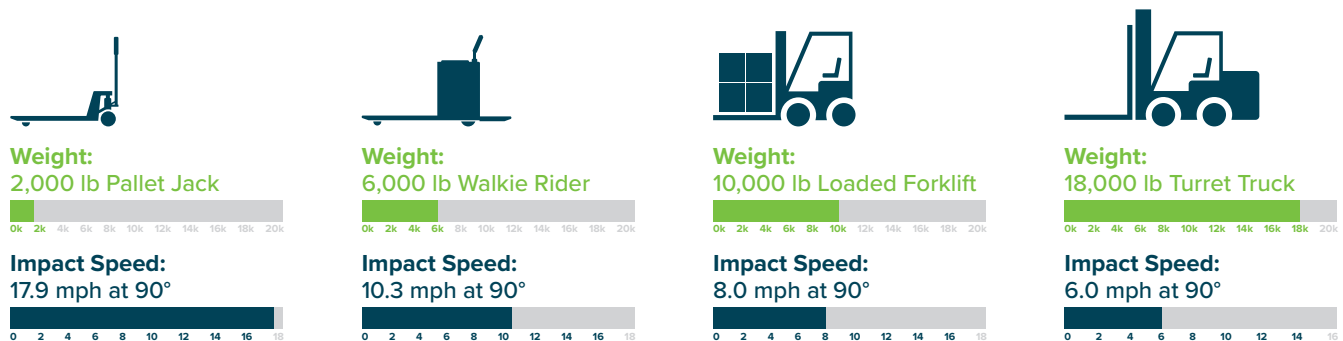

MATERIAL PROPERTIES


BARRIER DEFLECTION:

Flexible rails for maximum energy absorption.

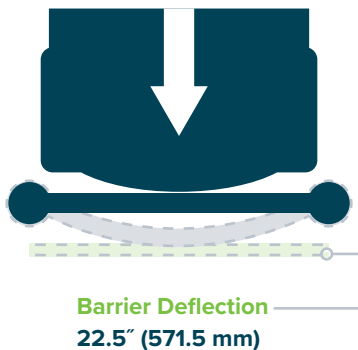



Anchor Specifications:

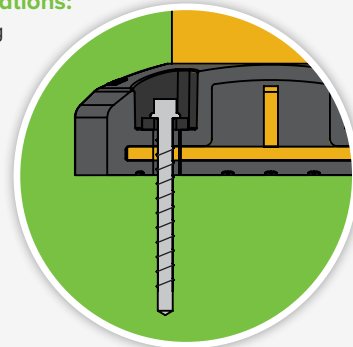A shock-absorbing anchor system protects both the anchors and the floor.



	Working Temperatures	32°F-130°F (0°C-54°C)
	Toxicity	Not Hazardous

	Flammability	Does Not Easily Ignite
	REACH / TSCA / DSL	Compliant

* PATENTS PENDING

SAFESTOP *PEDESTRIAN GUARDRAIL*

SafeStop Pedestrian GuardRail

Hardware included.

