



SAFESTOP RACKEND PROTECTOR DOUBLE

**INNOVATIVE PROTECTION FOR YOUR RACKS
AND UPRIGHTS**

**KEEP YOUR OPERATIONS SAFE AND YOUR WORKFORCE SAFER WITH THE WORLD'S MOST
ADVANCED SAFETY BARRIERS — SPEAK TO A SAFETY SPECIALIST TODAY (800) 800-8503**



McCue

SAFER IMPACTS:
Polymer rails flex to absorb impact energy.

EASY TO CONFIGURE:
Proprietary rail connections make installation easy.

REDIRECTS GLANCING BLOWS:
Spinning technology deflects impact energy – perfect for high-traffic corners.

DOUBLE LEVEL PROTECTION:
Second rail adds even more coverage and conforms to EN 15512 Racking Standard.

STOPPING POWER:
Industry-leading strength from multi-material technology.




SAFESTOP RACKEND PROTECTOR DOUBLE



Introducing **SafeStop RackEnd Protector Double**, a flush-mounted safety barrier that protects racking, uprights and your facility. Its combined shock-absorbent materials give it the ability to slow and stop material handling equipment – ensuring the safety of your employees and the integrity of your concrete floors.

HOW IT WORKS


SafeStop RackEnd Protector Double is packed full of innovative technology to safely stop heavy machinery. Upon impact, its reinforced uprights offer strength while its shock-absorbing rails flex to dissipate impact energy – keeping your operators, forklifts, and facility safe.

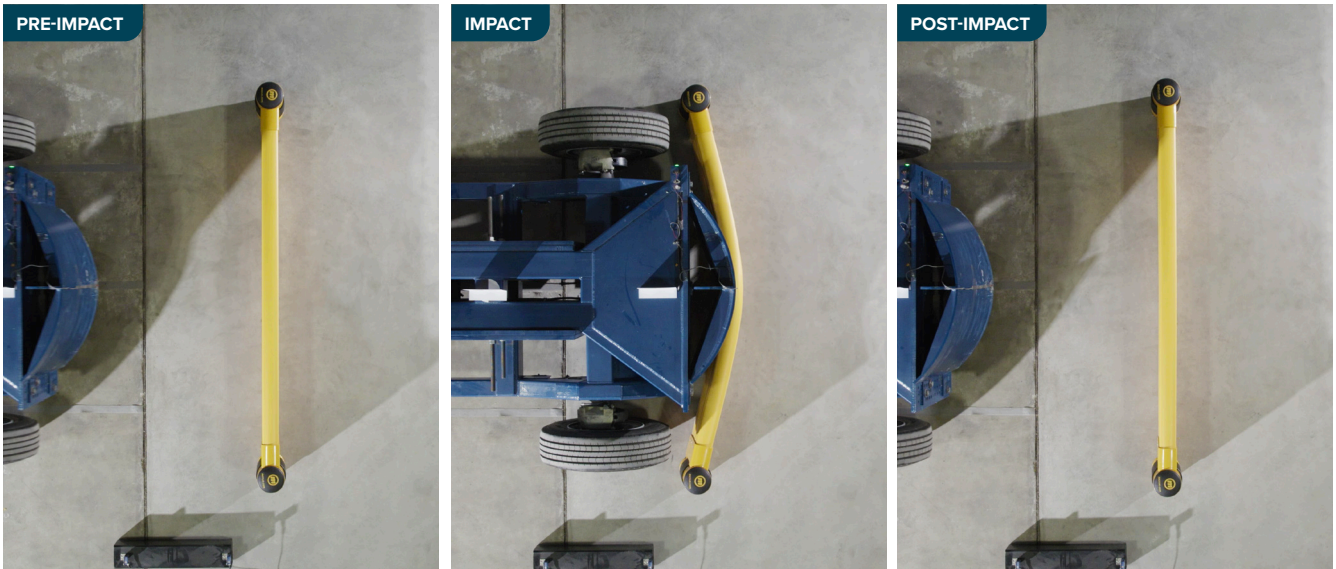

* PATENTS PENDING

IMPACT TESTING

Rigorous product testing at the highest standard.

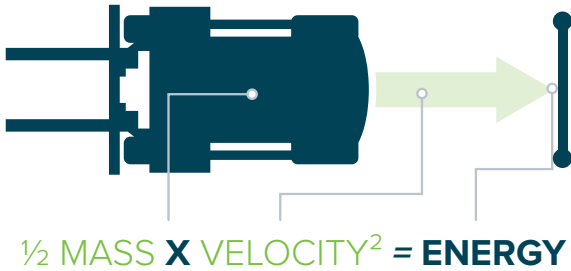



Ultimate Strength Rating
7,376 ft-lbs (10,000 J)

 **x** 

8,755 lbs (3971 kg) **5.02 mph (8.08 kmh)**


90°	7,376 ft-lbs	10,000 J	45°	10,432 ft-lbs	14,144 J	30°	14,751 ft-lbs	20,000 J
------------	---------------------	-----------------	------------	----------------------	-----------------	------------	----------------------	-----------------

WHAT DOES 7,376 FT LBS (10,000 J) MEAN TO YOU?

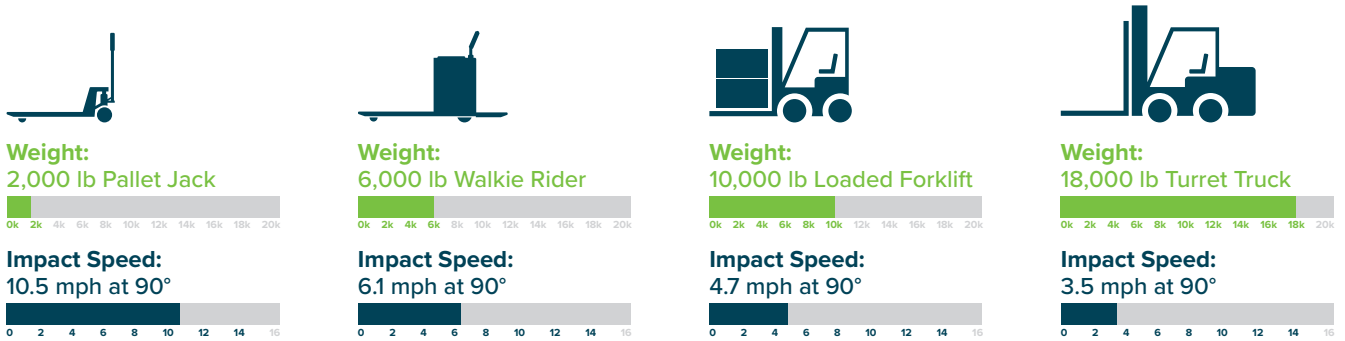


MATERIAL PROPERTIES

BARRIER DEFLECTION:

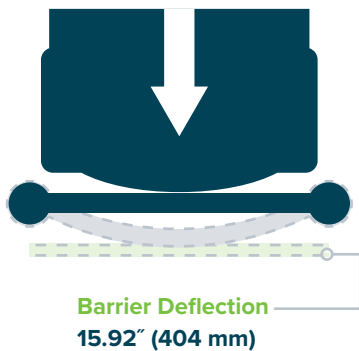



Anchor Specifications:

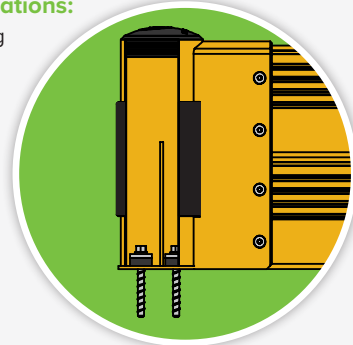A shock-absorbing anchor system protects both the anchors and the floor.



	Working Temperatures	32°F-130°F (0°C-54°C)
	Toxicity	Not Hazardous

	Flammability	Does Not Easily Ignite
	REACH / RSCA / DSL	Compliant

* PATENTS PENDING

SAFESTOP **RACKEND PROTECTOR** DOUBLE

SafeStop RackEnd Protector Double

KIT NUMBER: RPD-K-120-307

Kit Includes:
 2 Ends (RPD-C-END-307)
 2 Rails (GB-C-RAL-307)
 Hardware

