



# SOLARGLOW SIGNAGE



**SUSTAINABLE SOLAR POWERED SIGNAGE**

**A BETTER, SAFER SHOPPING EXPERIENCE BEGINS AND ENDS IN THE PARKING LOT —  
SPEAK TO A SIGNAGE SPECIALIST TODAY (800) 800-8503**



**DAYS OF AUTONOMY:**  
Works for three days without receiving a charge.

**ILLUMINATES AT DUSK:**  
Entire placard automatically illuminates at night.

**PERSONALIZED GRAPHICS:**  
Customize your sign and display your message and branding.

**VERSATILE:**  
Fits on any McCue sign.

# SOLARGLOW SIGNAGE

Improve the customer experience in your parking lots with an environmentally friendly backlit sign. Powered by the sun, **SolarGlow Signage** automatically turns on at dusk, keeping your signage highly visible and bringing order to your lots. This signage solution brightly extends your brand outdoors and will last for years.

## THE BENEFITS OF SOLAR

Reusable and Energy Efficient



**DAYLIGHT CHARGING:**  
Sunlight falls on the panel, converts into energy, and is stored for later use.



**NIGHT TIME POWER:**  
Sign automatically turns on at dusk, providing bright backlighting.

\* PATENTS PENDING


## SOLARGLOW SIGNAGE

### SolarGlow Signage

Hardware included.

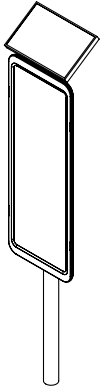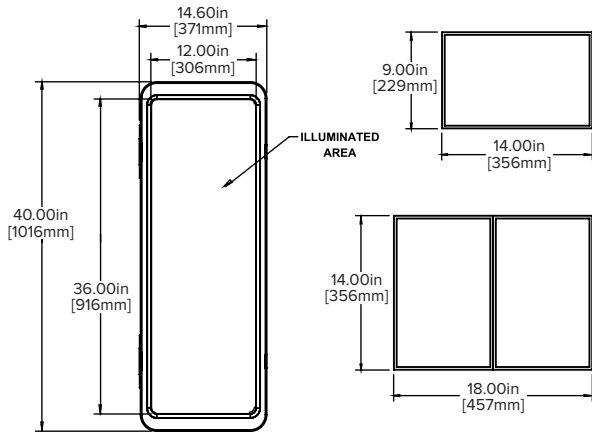


**Single-Sided Signage**  
Part #: SGP-K-1236-1-XXX

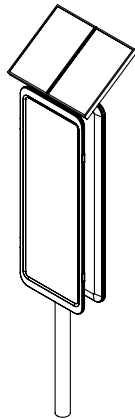


**Double-Sided Signage**  
Part #: SGP-K-1236-2-XXX

### Sign Post Options


After choosing your sign, please select your preferred base and signpost.

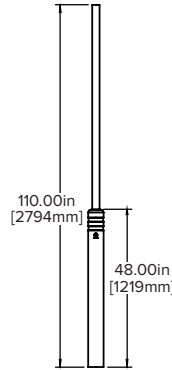


**BumperSign Flex**  
Part #: BSF-XXX

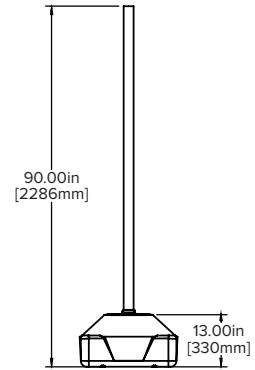

**BumperSign Mobile**  
Part #: BSM-NT-XXX

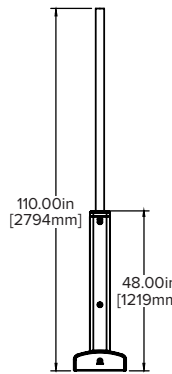

**BumperSign Standard**  
Part #: BS-V2-COLOR

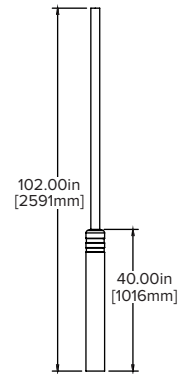

**CrashCore Signage**  
Call for details

### Technical Specifications

#### Battery:

CHEMISTRY	LiFePo4
VOLTAGE	12v
CAPACITY	30ah
EFFICIENCY	5 Watts
DISCHARGE TEMPERATURE	-4° to 140° F (-20° to 60° C)
CHARGE TEMPERATURE	23° to 95° F (-5° to 35° C)
DAYS OF AUTONOMY	3 Days
EXPECTED LIFESPAN	+5 Years

#### Solar Panel:

WATTAGE	25 Watts
MAX POWER VOLTAGE	18.2V
MAX POWER CURRENT	1.39A
WATERPROOF RATING	IP65
ULTIMATE WIND & SNOW LOAD RATING	6000pa

#### LED Placard:

COLOR TEMPERATURE	6500K
WATERPROOF RATING	IP65
ILLUMINANCE	750 lux @ 6"
WATTAGE	5 Watts
VOLTAGE	12 V

#### Custom Solar Controller:

CHARGE CONTROLLER TYPE	PWM
LIGHT TIMER	6 hours at dusk

\* PATENTS PENDING